



# OC-48/STM-16 SFP Transceiver Bi-Directional 1490nm Tx/1550nm Rx 80km P/N AL26A0x-4955



## Description

Menara Networks' AL26A0x-4955 bi-directional transceivers are designed for use in links of 80km over a single strand of single mode fiber. The SFP module supports SONET/SDH OC-48 and STM-16 applications along with lower speed OC-3/12, STM-1/4, IEEE 802.3 100M/1G Ethernet and 1G/2G Fibre Channel applications.


Digital Optical Monitoring interfaces are provided via the SFP SFF-8472 standards compliant I2C interface. The receiver features differential ac-coupled data outputs and LVTTTL for LOS (Loss of Signal) output. Circuit ground is internally isolated from frame ground.

## Applications

- 80km OC-48/STM-16 bi-directional single fiber transport

## Features

- Hot-pluggable SFP footprint
- RoHS compliant
- Bi-directional optical data links over a single strand of single mode fiber
- Compliant with SFP MSA
- Digital diagnostic SFF-8472 compliant
- 1490nm DFB transmitter
- 1550nm wavelength specific APD receiver
- Very low jitter
- Metal package for lower EMI
- Single power supply voltage : +3.3V
- Low power dissipation
- LC diplexer connector
- Laser Class 1 IEC/CDRH compliant
- Distances of 80km

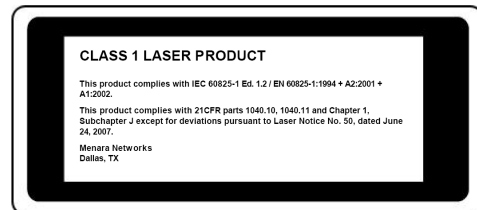

## Transmitter E-O Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Note
Support data rate	-	100	2488	2670	Mb/s	
Center Wavelength	$\lambda$	1470	1490	1510	nm	
Spectral Width (RMS)	$\Delta\lambda$			1.0	nm	
Side Mode Suppression Ratio	SMSR	30			dB	
Average Optical Output Power	P <sub>o</sub>	0		+5	dBm	1
Extinction Ratio	E <sub>r</sub>	9			dB	
Optical Rise/Fall Time (20%~80%)	tr/tf			0.16	ns	
Output Eye Diagram	Compliant with Eye Mask Defined in GR-253 standard					
Data Input Swing Differential	V <sub>IN</sub>	400		1800	mV	2
Input Differential Impedance	Z <sub>IN</sub>	90	100	110	$\Omega$	
TX Disable	Disable	2.0		V <sub>CC</sub>	V	
	Enable	0		0.8	V	
TX Fault	Fault	2.0		V <sub>CC</sub>	V	
	Normal	0		0.8	V	

1. The optical power is launched into SMF.
2. PECL input, internally AC-coupled and terminated

## Receiver O-E Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Note
Support data rate	-	100	2488	2670	Mb/s	
Operating Wavelength	$\lambda$	1530	1550	1570	nm	
Receiver sensitivity	S <sub>en</sub>			-28	dBm	3
Saturation	P <sub>sat</sub>	-9			dBm	3
Receiver Optical Return Loss	-			-27	dB	
LOS Assert	LOS <sub>A</sub>	-35			dBm	
LOS Deassert	LOS <sub>D</sub>			-31	dBm	
LOS Hysteresis		1		4	dB	
Data Output Swing Differential	V <sub>OUT</sub>	400		1800	mV	4
LOS	High	2.0		V <sub>CC</sub>	V	
	Low	0		0.8	V	

3. Measured with a PRBS 2<sup>23</sup>-1 test pattern @ 2488Mbps, BER  $\leq 1 \times 10^{-12}$
4. Internally AC-coupled

## Ordering Information

Part Number	ROHS Compliant	Operating Case Temperature
AL26A0x-4955	ROHS-6	0°C ~ +70°C

x = J for Juniper  
x = C for Cisco  
x = A for Alcatel  
x = O for Cisco ONS



[menarainfo@menaranet.com](mailto:menarainfo@menaranet.com)

[www.menaranet.com](http://www.menaranet.com)